



**Structa V Truss Corner is an improvement on our original Structacorner design. V Truss provides greater strength, ease of installation and increased embedment. V Truss is the result of our continued commitment to provide the best lathing products possible.**

**FEATURES**

- Engineered to provide superior reinforcement for stucco corners
- Unique Truss design ensures a consistent 'true' - straight reinforcing corner - every-time
- Increased rigidity for precise corner plaster work
- Improved embedment
- Abundant nailing opportunities & twin trac's – for ease of attachment
- Easy to handle with fewer sharp ends
- Available in both regular galvanized coating and our Chrom EX™ GOLD finish

Chrom EX™ products are recommended for coastal climates and for use with EIFS & Acrylic Stucco finishes

**DETAILS**

- A. Truss design provides greater strength
- B. X-Marks the spot to ensure straightness and 1/8" stucco thickness
- C. Three nose wires
- D. Twin Trac for easy attachment and increased rigidity

**PROFILES**

- 3 Coat Straight 9' and 10'
- Bullnose
- 1 Coat Straight 10'
- For Arch, Bullnose Arch and Short flange – we recommend our regular Structacorner design

**PACKAGING**

- 40 pieces per carton/30 cartons per pallet

**CHROM EX™ GOLD FINISH\***

- CHROM EX coating is available for all Structacorner products
- CHROM EX™ is a chromate process that provides increased corrosion resistance and a distinctive GOLD finish
- CHROM EX™ extends performance in coastal climates where salt air conditions attack regular galvanized wire
- Structa – CHROM EX™ provides more than 10-times the traditional protection of "regular" galvanized finish

*\* Test results available on request*

**PACKAGING**


- 50 pieces per carton / 30 cartons per pallet

Conforms to requirements for stucco reinforcing as defined in the UBC, IBC & IRC and in accordance with ASTM C 1063 and ASTM A 641

# V TRUSS CORNER

SPECIFICATION SHEET

ICC # ESR 2017

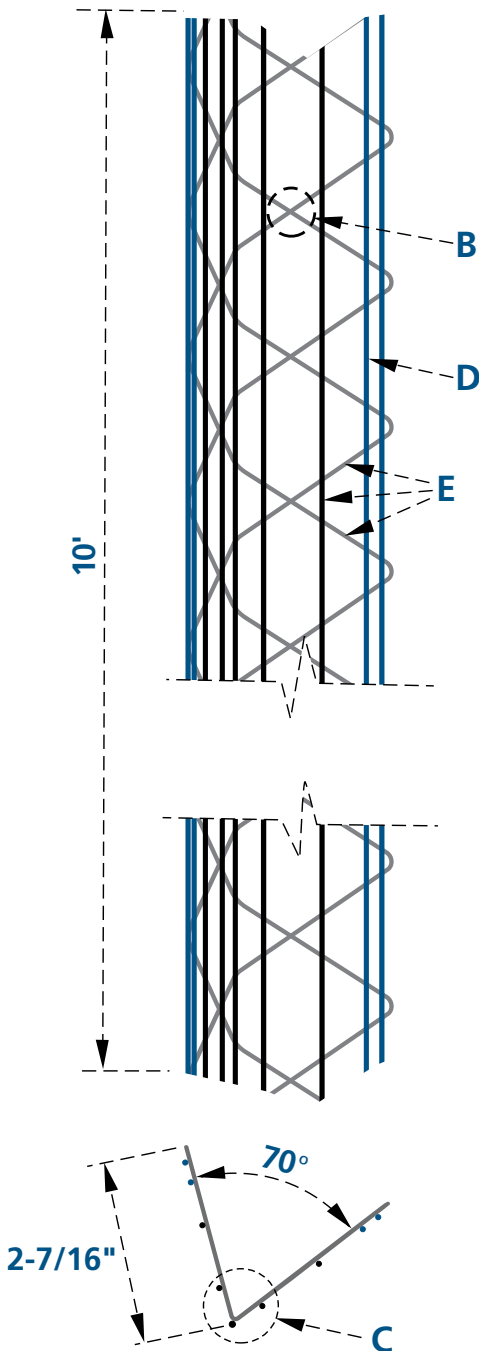

## DETAILS

- A. Truss design provides greater strength
- B. X-Marks the spot to ensure straightness and 1/8" stucco thickness
- C. Three nose wires
- D. Twin Trac for easy attachment and increased rigidity
- E. Alternate fastening points

Structalath products are for use as alternative laths used as reinforcement for exterior plaster complying with IBC Section 2507, IRC Section R703.6.1 or UBC Section 2508